


SPARIBO® Chipboard screw

RN 9267



GEOMETRY

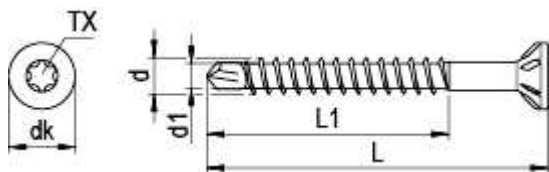

FEATURES

Article number	009267V138-0450400-1
GTIN	4005674462846
Code	46284/6
Material	Stainless steel A2
Surface	pickled, passivated, lubricated
Diameter d	4.5 mm
Length L	40 mm
Core diameter d1	3.0 mm
Thread length L1	26 mm
Head diameter dk	9.0 mm
Approval	ETA-11/0106
Drive type	TX
Drive size	20
Head shape	Countersunk head
Tensile capacity	4.0 kN
Breaking torque	3.0 Nm
Yield moment	2.6 Nm
Packaging classification	Small multipack
Packaging quantity	200
Packaging unit	Pcs.
Packaging size (H x W x D)	65,00 mm x 62,00 mm x 124,00 mm
Net weight	3.25 g
Gross weight	3.39 g

SPARIBO® Chipboard screw RN 9267



PRODUCT INFORMATION

ETA approval for wooden substructures.

ADVANTAGES

Product features:

TX

Excellent power transmission
No slipping
Secure processing

Countersunk head with milling ribs

Milling ribs ensure effective milled recessing of the head in the material
Flush countersinking

Single-start thread

High load-bearing capacity

Drill tip

Pre-drills and reduces splitting in the wood
No tool wear
Small edge distances possible



FIELD OF APPLICATION

Wood drilling screw for fixing wood close to the edge without gaps on wooden and aluminium substructures in indoor and outdoor applications.

Interior construction, frame fittings, fence construction