


Schlossaufnahmetaschen (M 1:3)

Taschen mit Fraeser ⌀ 16 mm fuer
Haupt- und Zusatzschlosskaesten am
Tuerblatt herstellen.

Bohrungen fuer Drueckergarnitur anbringen.
Verwenden Sie dazu die Angaben bzw.
Schablonen des Herstellers der Drueckergarnitur

ACHTUNG:
Abweichende Fraestiefen bei
Sonderkonstruktionen und/oder
Profilstulpen bitte anhand der
Profilzeichnung ermitteln.

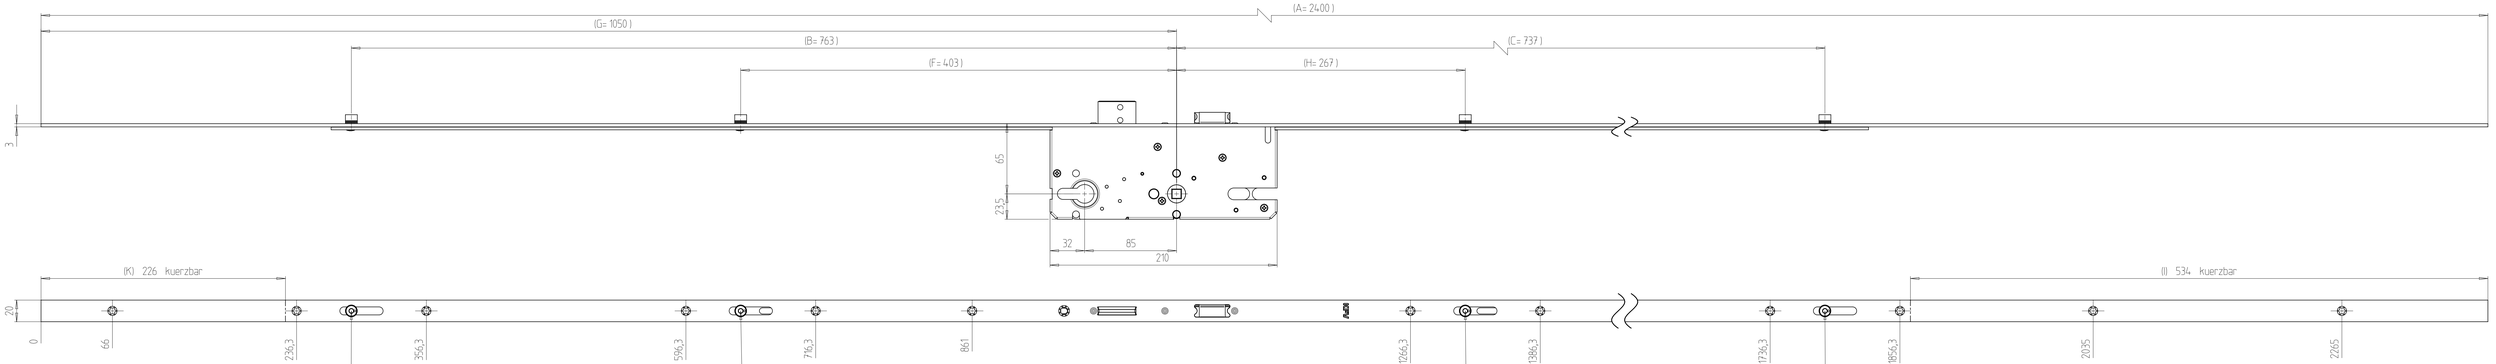


Rollzapfenstellung
in verriegelter Position

| Qty. | Type of Modification | ANT | Drawn | Approved | Date |
|---|---|---|---|---|---|
| | | EK1-2303201 | | | |

| Volume /mm³ | Weight/g | Material-No. | Item-No. | Tool-No. |
|---|---|---|---|---|
| | | | A58085-·····F-·2065B5-3(R0041 | |

| | | |
|---|---|---|
| Scale 1 : 2 | Tolerance | Part-Discription MFS 8085 |
| | Additional Notice F20, HS8085, SENK-NR.1 | |

| | | | | |
|---|---|---|---|---|
| Drawn Michael Wiesner | KFV | Document No. 1.8085.33084 | Doc. Part No. 065 | Revision 00 | Status 20 |
| Date 02.02.2023 | | | | |
| Appr. Ing. Sellmann | | Replacement for : | Test procedure | | Size U |
| Date 03.02.2023 | | Replaced by : | | | |

The Drawing and its contents are to be kept secret from third parties, particularly competitors. The drawing and documents which go with it are not to be duplicated either in total or extract, or made available to third parties without approval BES and BTBES. Errors & Mistakes excepted and BTBES reserves the right to amend this a good thing a good.